


Geberit PE broekstuk 2 x 30°

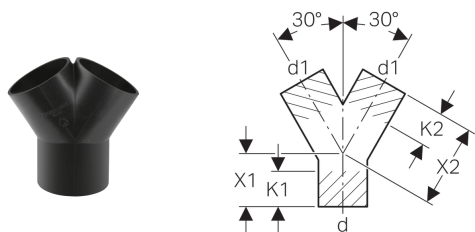

Gebruiksdoelen

- Voor terreinafwatering
- Voor de gebouwfvoer
- Voor verticale inbouw

Eigenschappen

- UV-bestendig

Technische gegevens

Materiaal

PE-HD

Art. nr.	DN	d, ø	d1, ø	arc	X1	X2	K1	K2
361.459.16.1	50 / 40	50 mm	40 mm	60 °	5.5 cm	11 cm	4 cm	5 cm
361.462.16.1	50 / 50	50 mm	50 mm	60 °	5.5 cm	11 cm	3 cm	4 cm
363.462.16.1	56 / 50	56 mm	50 mm	60 °	6 cm	12 cm	4 cm	5 cm
363.465.16.1	56 / 56	56 mm	56 mm	60 °	1.8 cm	5.3 cm	0 cm	0 cm
364.462.16.1	60 / 50	63 mm	50 mm	60 °	6.5 cm	13 cm	5 cm	6 cm
364.465.16.1	60 / 56	63 mm	56 mm	60 °	6.5 cm	13 cm	4 cm	6 cm
365.465.16.1	70 / 56	75 mm	56 mm	60 °	7 cm	14 cm	6 cm	7 cm
365.470.16.1	70 / 60	75 mm	63 mm	60 °	7 cm	14 cm	5 cm	6 cm
367.480.16.1	100 / 90	110 mm	90 mm	60 °	9 cm	18 cm	7 cm	7 cm
367.481.16.1	100 / 100	110 mm	110 mm	60 °	9 cm	10.2 cm	5 cm	0 cm

Aangemaakt met Geberit Online-productcatalogus - 17/08/2018