


Geberit elektrolasmof

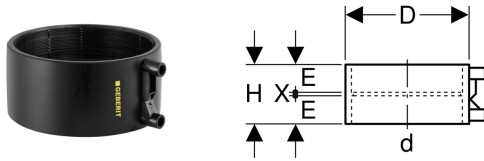

Gebruiksdoelen

- Voor het trekvast en permanent verbinden van buizen en fittingen

Eigenschappen

- UV-bestendig

Technische gegevens

Montagetemperatuur	-10 - +40 °C
Materiaal	PE-HD

Art. nr.	DN	d, ø	D	H	E	X
360.771.16.1	40	40 mm	5.2 cm	6 cm	2.8 cm	0.3 cm
361.771.16.1	50	50 mm	6.2 cm	6 cm	2.8 cm	0.3 cm
363.771.16.1	56	56 mm	6.8 cm	6 cm	2.8 cm	0.3 cm
364.771.16.1	60	63 mm	7.6 cm	6 cm	2.8 cm	0.3 cm
365.771.16.1	70	75 mm	8.9 cm	6 cm	2.8 cm	0.3 cm
366.771.16.1	90	90 mm	10.4 cm	6 cm	2.8 cm	0.3 cm
367.771.16.1	100	110 mm	12.5 cm	6 cm	2.8 cm	0.3 cm
368.771.16.1	125	125 mm	14.2 cm	6 cm	2.8 cm	0.3 cm
369.771.16.1	150	160 mm	17.8 cm	6 cm	2.8 cm	0.3 cm

Aangemaakt met Geberit Online-productcatalogus - **22/08/2018**